
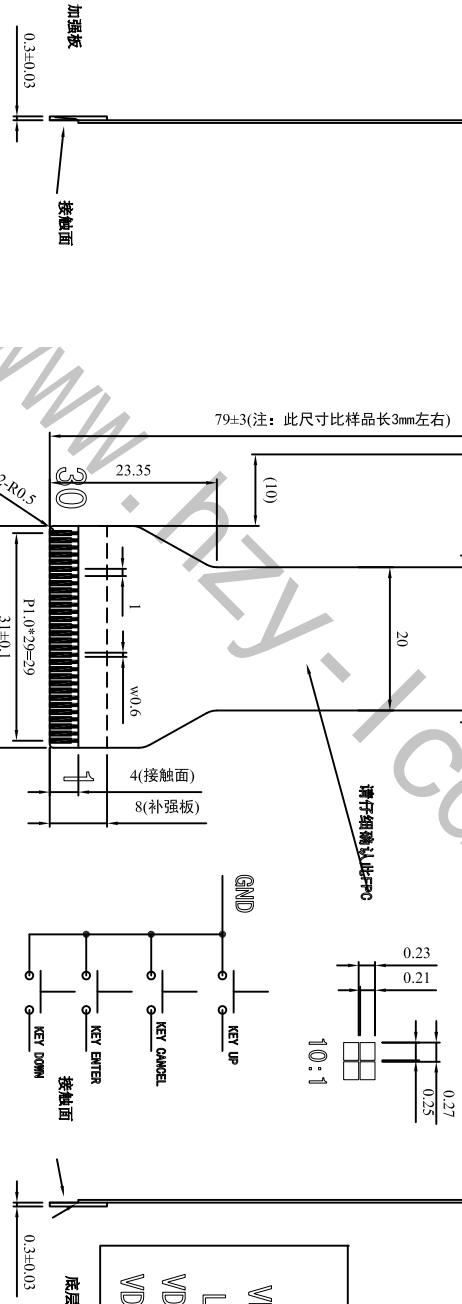
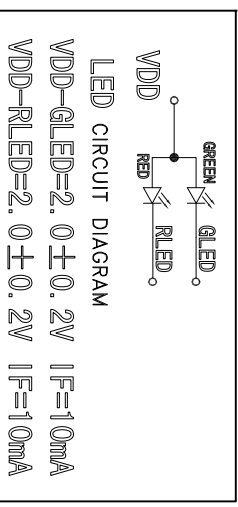
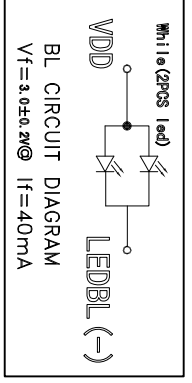


客户确认签字:

REVISIONS		DATE	APPROVED
ZONE	REV	DESCRIPTION	

PIN ASSIGNMENT

NO.	SIGNAL	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
1	NC	GLED	RLED	/CS	/WE	/OE	LEDBL	RST	KEY ENTER	KEY CANCEL	KEY UP	D3	D2	D1	D0	A0 LCD	PSB				
2	NC																				
3	NC																				
4	NC																				
5	GND																				
6	GND																				
7	KEY DOWN																				
8	KEY ENTER																				
9	KEY CANCEL																				
10	KEY UP																				

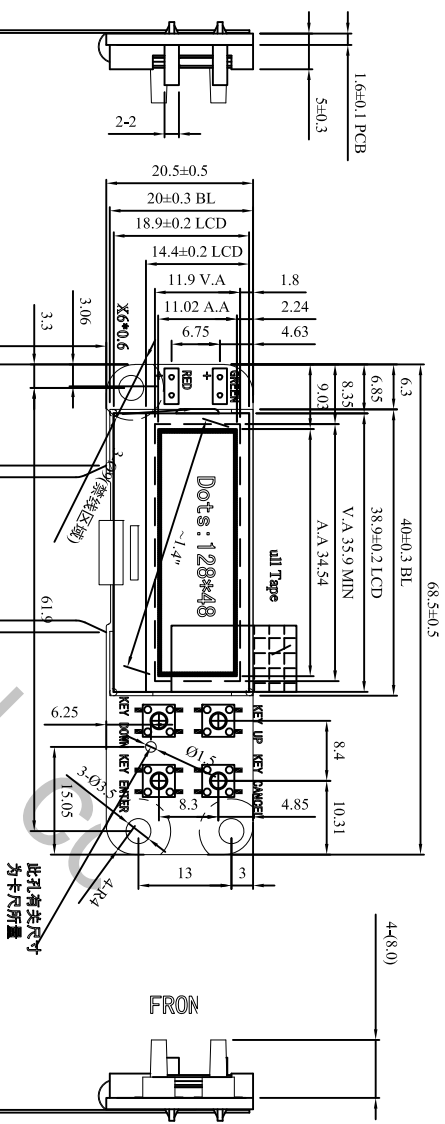

RoHS Compliant

1	Lcd Type	FSTN, Positive
2	Viewing Direction	12 O'clock
3	Drive Method	1/4DUTY, 1/8BIAS
4	Polarizer Mode	Transflective
5	Operating Voltage	VDD3.3V, VOP 8.96V(RIEF)
6	Operating Temperature	-20°C~70°C
7	Storage Temperature	-30°C~80°C
8	IC	ST7567 OR EQU
9	Backlight	White, 2颗LED, Vr=3.0±0.2V, If=30~40mA



深圳市华之洋光电科技有限公司

DRAWNBY:	xjh	LCM NO:HO12848R1-WFK014-00	UNIT: mm
CHECKEDBY:			
APPROVED BY:			
DATE:	20190909	CUSTOMER NO:	1 OF 1