


REV	DATE	CONTENT
V1	2018.10.30	First release


PIN Definition

PIN	SIGNAL
1	CS1
2	RST
3	A0
4	/WR
5	/RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD
15	VSS
16	NC
17	NC
18	V0
19	XV0
20	NC
21	NC
22	VG
23	NC
24	NC
25	NC
26	NC
27	NC
28	G86
29	PS
30	NC

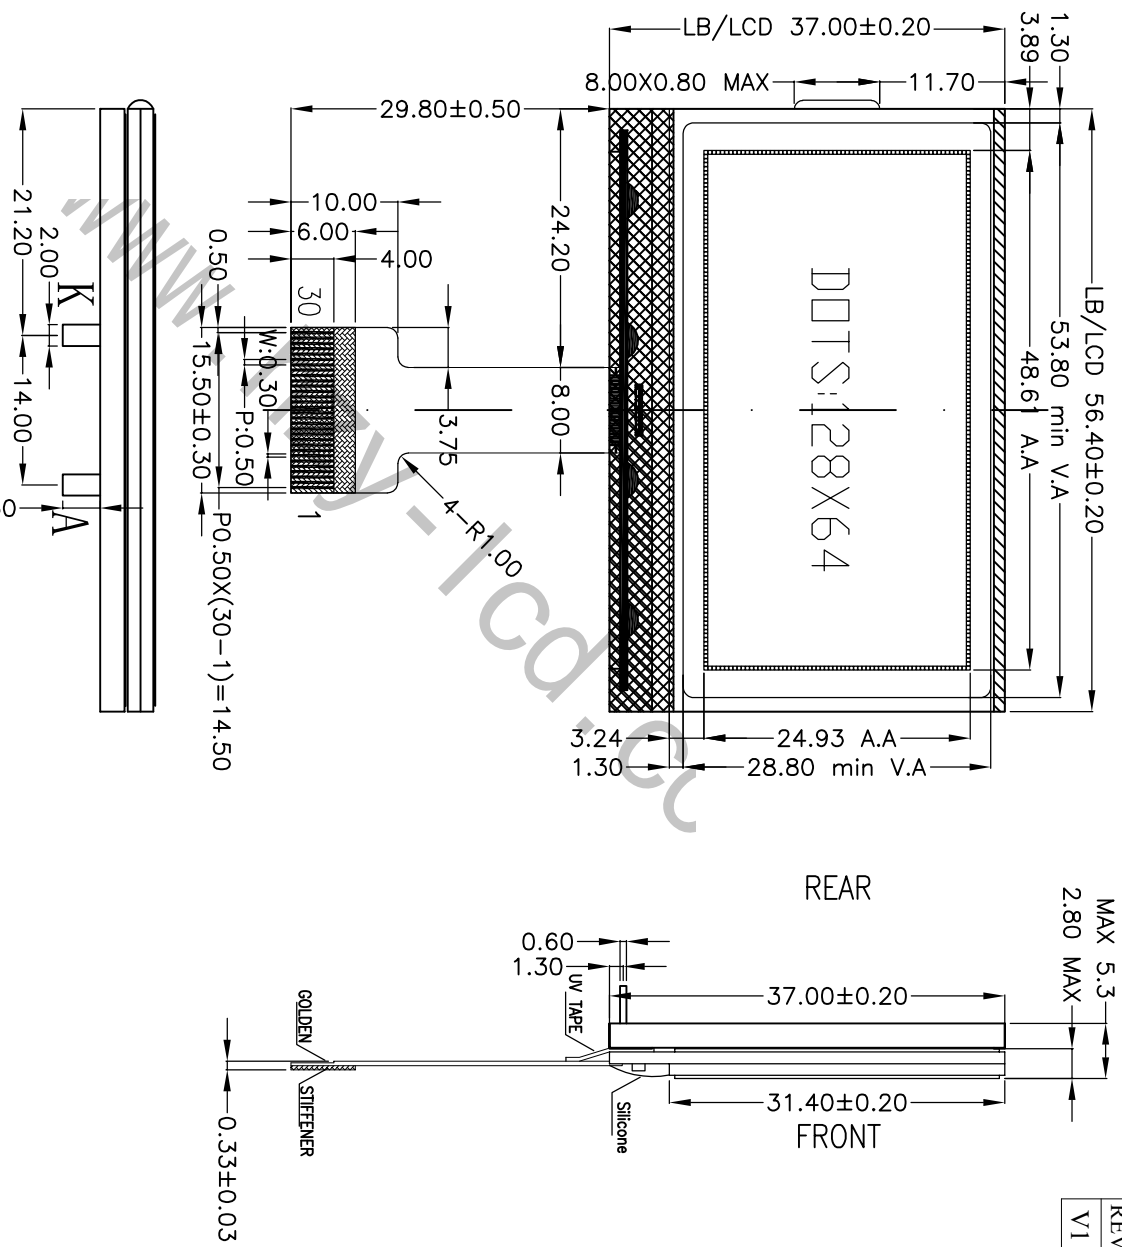

电路CIRCUIT DIAGRAM

(LED SMD 1 X 4 = 4 dies)

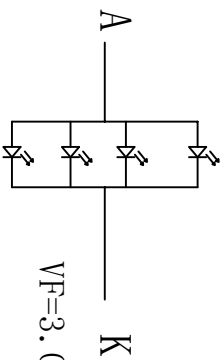

The non-specified tolerance of dimension is ±0.3mm.

1	Lcd Type	FSTN,NPOSITIVE
2	Viewing Direction	6 O'clock
3	Drive Method	1/65D,1/9B
4	Polstrizer Mode	TRANSFLECTIVE
5	VDD/VOP	VOP9.8V/VDD3.0V
6	Operating Temperature	-10°C~60°C
7	Storage Temperature	-20°C~60°C
8	IC	
9	Backlight	White
10	Environmental requirements	ROHS compliance

SCALE:	UNIT:	MODEL
1/1	mm	HZY Display CO.,
REV: V1	PAGE: 1/1	LCM DRAWING
DRAW	Xia Hang	LCM DRAWING
CHECK		
APPROVE		HO12864F-WFH-00