





电路图 CIRCUIT DIAGRAM
1*4=4(DIES)
V=5.0V, IF=50~60mA (TYPE)

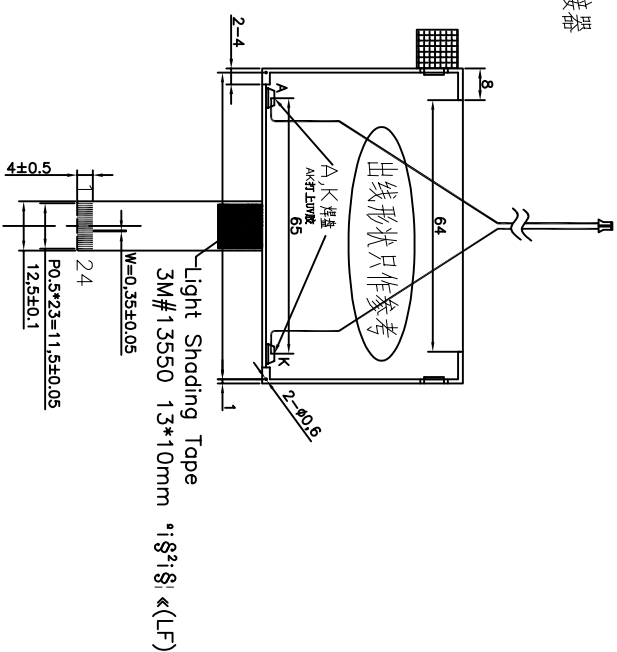

White LED, $V_f=3.2V$ ($I_f=50\sim 60mA$) TYPE

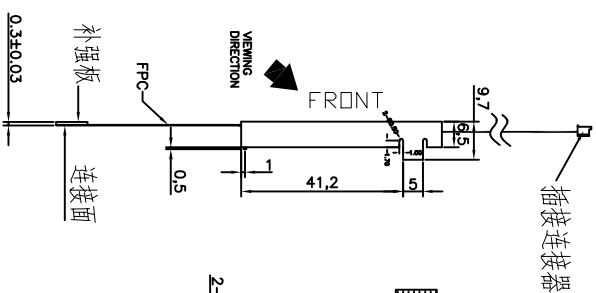

1	NC
2	/CS1
3	/RES
4	A0
5	/WR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	VDD
16	VSS
17	VSS
18	V0
19	XV0
20	VM
21	VG
22	C86
23	P/S
24	NC

The non-specified tolerance of dimension is $\pm 0.3mm$.

HZY Display CO., LTD

1. DISPLAY TYPE:	FSTN, Positive	5. DRIVE METHOD:	1/65D, 1/9B
2. POLARIZER MODE:	TRANSFLECTIVE	6. OPERATING TEMP.:	-20°C ~ 70°C
3. VIEWING DIRECTION:	6 O'clock	7. STORAGE TEMP.:	-30°C ~ 80°C
4. OPERATING VOLTAGE:	VDD 3.0V VOP9.0V(REF)	8. CONNECTOR:	ST7567/COG

DRAWNBY:	Villain	LCM NO.:	HO12864V-WFH-01
CHECKEDBY:	Villain	UNIT:	mm
APPROVED BY:	Villain	CUSTOMER NO.:	1 OF 1
DATE:	2018-10-15		