



ROSH

Revision	Description	Date	Signed
01	First	2021.08.31	YP

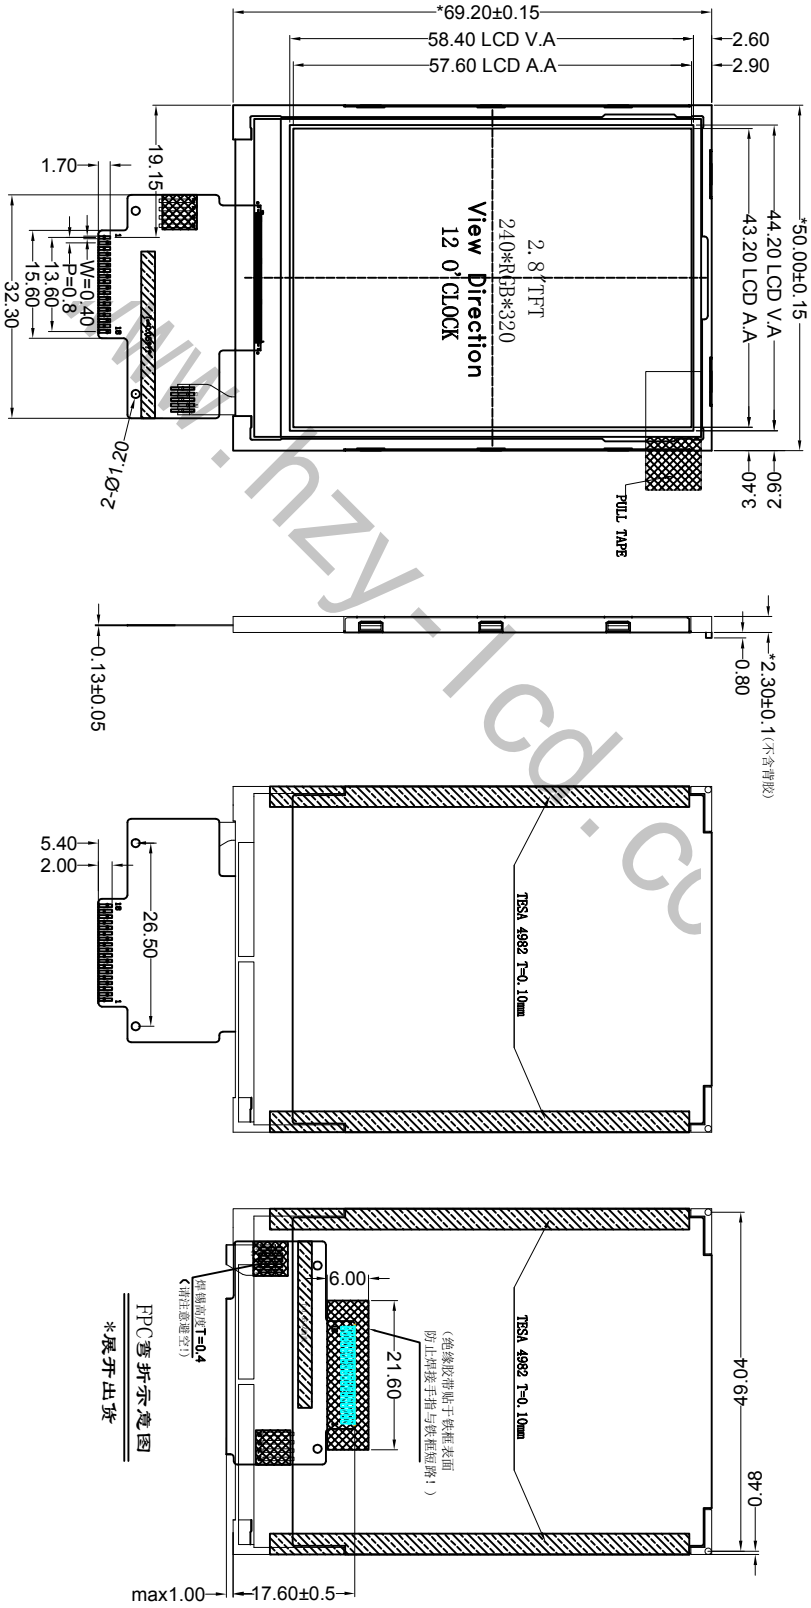

PIN	SYMBOL
1	GND
2	RESET
3	SCL
4	RS
5	CS
6	SDA
7	SDO
8	GND
9	VCI
10	LEDA
11	LEDK1
12	LEDK2
13	LEDK3
14	LEDK4
15	XL
16	YU
17	XR
18	YD



- NOTES:
1. DISPLAY TYPE: 2.8" TFT, TRANSMISSIVE
 2. DRIVER IC: ST7789V2
 3. VIEWING DIRECTION: 12 O'CLOCK
 4. BACKLIGHT: 4 pcs White LED
 5. INPUT CURRENT: VCC 2.8V (t type)
 6. OPERATING TEMP: -20 °C ~ +70 °C
 7. STORAGE TEMP: -30 °C ~ +80 °C
 8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
 9. ROHS COMPLIABLY

深圳市华之洋光电科技有限公司
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title				
---	---	HZ028QTC01-A0				
Part No.	Approve	Material	Unmarked Tolerance	Unit	Scale	Page
---	Checked	LCM	±0.2	mm	---	1 of 1
Drawing No.	Draw	Date	Rev			
---	YP	2021.06.18	Rev 00			