
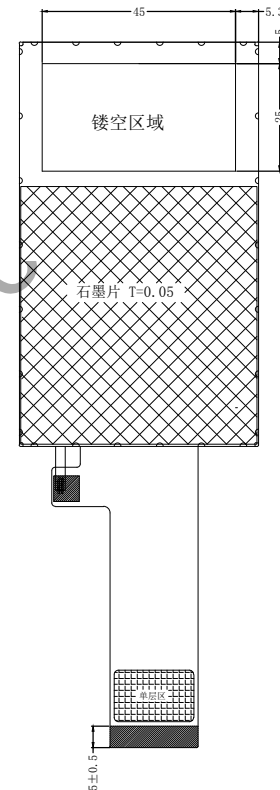


ROSH

Reversion	Discription	Date	Signed
A0	First	2025.07.18	Allen

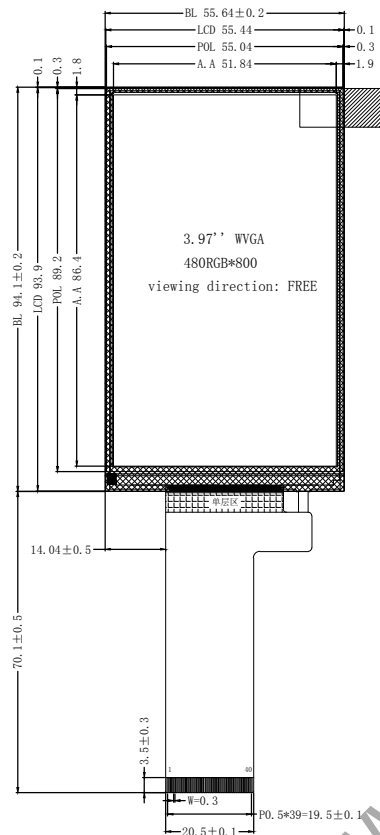


PIN DESCRIPTION

1	K
2	A
3	GND
4	VCC
5~12	R0~R7
13~20	G0~G7
21~28	B0~B7
29	GND
30	CLK
31	NC
32	HS
33	VS
34	DEN
35	NC
36	GND
37	RST
38	CS
39	SCL
40	SDA

NOTES:

- DISPLAY TYPE:3.97" TFT, TRANSMISSIVE
- DRIVER IC:ST7701SN or compatible
- VIEWING DIRECTION: ALL
- BACKLIGHT: 10 pcs White LED
- BRIGHTNESS: 1000cd/m² (TYP)
- INPUT CURRENT: VCC 2.8V (TYP)
- OPERATING TEMP: -20° C ~ +70° C
- STORAGE TEMP: -30° C ~ +80° C
- UNDEFINED DIMENSION TOLERANCE: ±0.3mm
- RoHS COMPLIABLY
- 建议机壳开窗可视区比 LCD A. A区单边大 0.3mm



VF=12V(TYP); IF=100mA
LED CIRCUIT DIAGRAM

FPC展开出货

		深圳市华之洋光电科技有限公司 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD						
Customer Ref.	Model No.		Drawing Title	HZ0397WVPBSWU01N-AA				
---	Part No.	Approve	Material	Unmarked Tolerance	Unit	Scale	Page	
---	Drawing No.	Checked	LCM	±0.3	mm	--	1 of 1	
---	Draw	Allen	Date	2024.07.18	Rev 00	