


ROSH

Revision	Description	Date	Signed
01	First	2022.03.10	YP

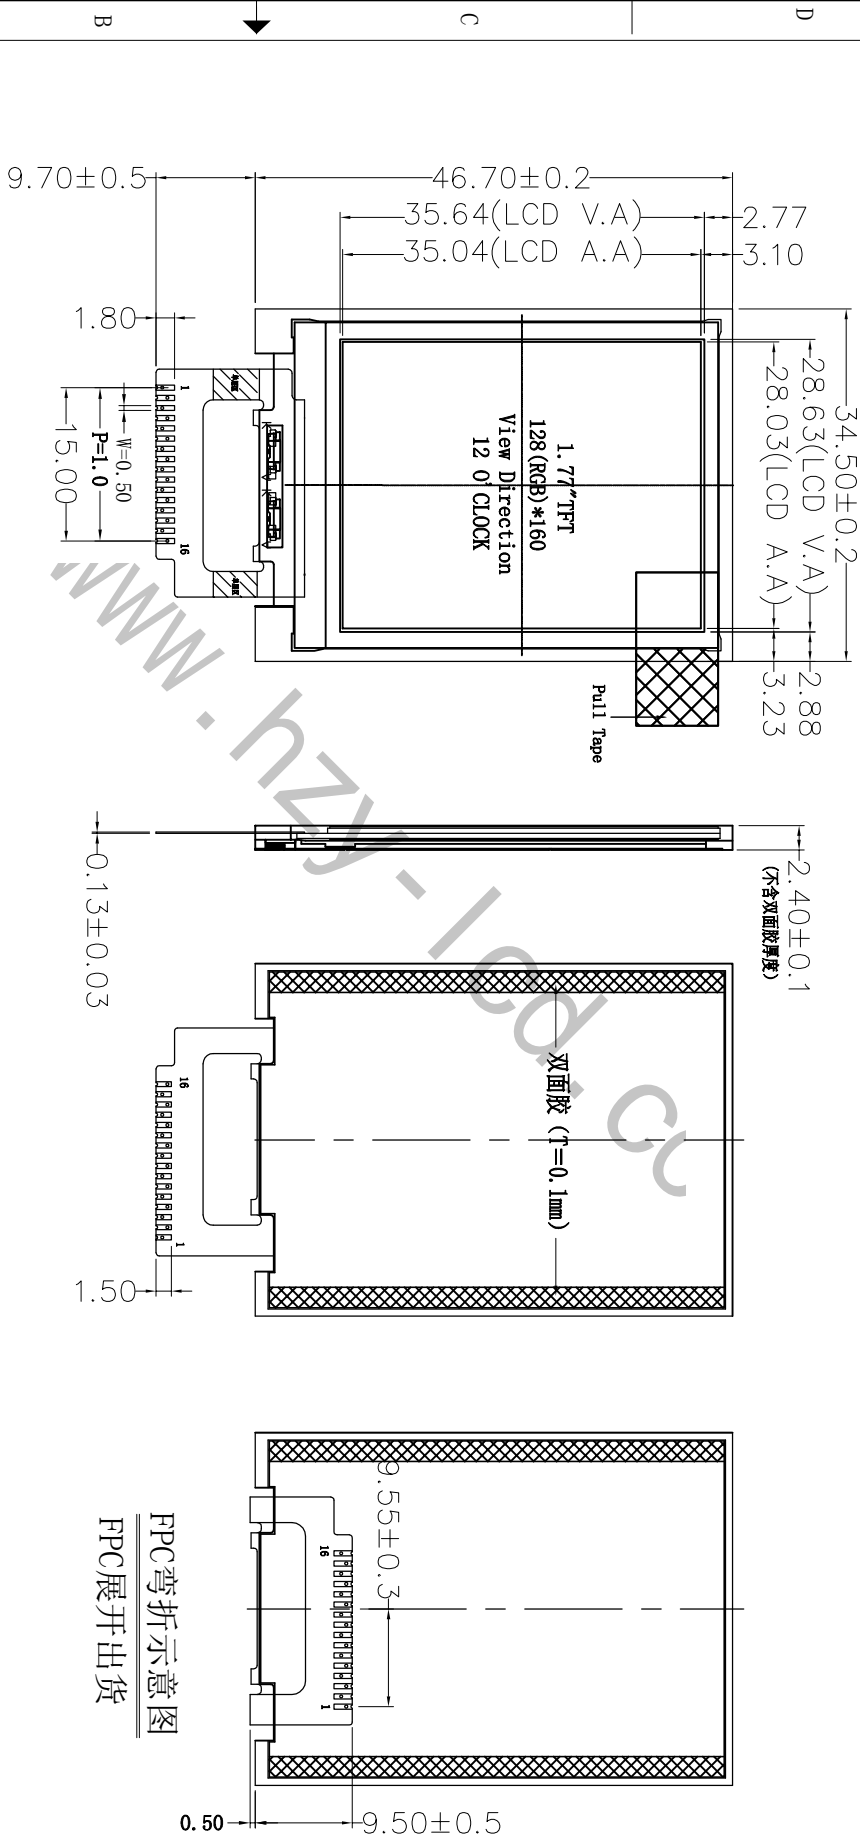


PIN	DESCRIPTION
1	GND
2	BL A
3	VDD(2.8)
4	/CS
5	RSTB
6	SCK
7	SDA
8	SA0
9	TE
10	IOVCC(1.8)
11	BL K
12	GND
13	NC
14	NC
15	NC
16	NC

四线一通道

FPC弯折示意图
FPC展开出货

NOTES:

1. DISPLAY TYPE: 1.77" TFT, TRANSMISSIVE
2. DRIVER IC: ST7735S
3. VIEWING DIRECTION: 12 O'CLOCK
4. BACKLIGHT: 2 pcs White LED
5. INPUT CURRENT: VCC 2.8V (type)
6. OPERATING TEMP: -20°C ~ +70°C
7. STORAGE TEMP: -30°C ~ +80°C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. ROHS COMPLIABLE



深圳市华之洋光电科技有限公司
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	Material	Unmarked Tolerance	Unit	Scale	Page
---	Approve	HZ177ETCS01-A0	LCM	±0.2	mm	--	1 of 1
---	Checked						
---	Draw	YP					